




Corotop BUTYL

Double-sided butyl tape

Double-sided, waterproof sealing tape made of butyl rubber with a foil spacer. Reduces the diffusion of water vapour. Very highly resistant for UV radiation and ageing processes.

Advantages

- ✓ effectively sealing
- ✓ moisture and water resistant
- ✓ flexible
- ✓ universal - glues on smooth and rough surfaces

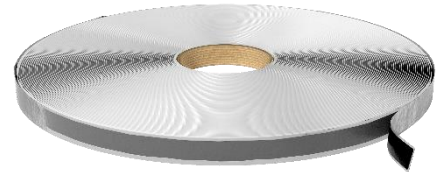

Application

- ✓ for bonding roof, vapour-barrier and foundation foils
- ✓ for sealing joints of a foil and other materials
- ✓ for bonding other materials such as plastics, concrete and steel

Characteristics

Material	butyl rubber	Peel strength of joints	≥25 N/25 mm
Colour	black	Elongation	100 %
Length (m)	25 m	Temperature of application	+5°C to +40°C
Width (mm)	15 mm	Temperature resistance	-30°C to +70°C
Thickness (mm)	1,2 mm		

Installation

1. Clean the surface from dust and other contamination.
2. Do not tighten the tape on the bonding surface.
3. Observe the recommended temperature for using.

Storage

The product should be stored in the manufacturer's original packaging, in dry, covered areas. The product should be transported in covered means of transport, secured against damage.

Packaging

Quantity per box (pcs.):	1
Quantity on a pallet (pcs):	600

The information contained in this data sheet, particularly recommendations regarding the manner and conditions of application as well as the scope of use of the product, have been developed based on our experience, our best knowledge and in good faith. Apart from the information given in this data sheet, health and safety regulations, etc. must be observed. This technical data sheet supersedes all previous versions applicable to this product.